

JC916 U. S. PTC

08-29-00

A

jc586 U.S. PRO
09/649473
08/28/00

UTILITY
PATENT APPLICATION
TRANSMITTAL

Attorney Docket No.: PAR-115-C

First Named Inventor or Application Identifier: Allan McCarty

Title: BILLIARD CUE

Express Mail Label No.: EL596485823US

[Only for new non-provisional applications under 37 CFR 1.53(b)]

APPLICATION ELEMENTS

See MPEP 800 concerning utility patent application contents

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Applications
Washington, DC 20231

1. ☒ Fee/Express Mail Transmittal Form
(Submit an original, and a duplicate for fee processing)

2. [X] Specification [Total Pages 12]
(preferred arrangement set forth below)

- Descriptive Title of Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claims
- Abstract of the Disclosure

3. [X] Drawing(s) (35 USC 113) [Total Sheets 3]

4. [X] Oath or Declaration [Total Pages 2]

- a. ☐ Newly executed (original or copy)

- b. ☒ Copy from prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 16 completed)

- i. [] DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).

5. [] Microfiche Computer Program (Appendix)

6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. [] Assignment Papers (cover sheet & documents)

8. ☐ 37 CFR 3.73(b) Statement
(when there is an assignee)
☐ Power of Attorney

9. [] English Translation Document (if applicable)

10. ☐ Information Disclosure Statement (IDS)/PTO-1449
☐ Copies of IDS Citations

- ## 11. [] Preliminary Amendment

12. [X] Return Receipt Postcard (MPEP 503)
(should be specifically itemized)

13. ☐ Small Entity Statement(s)
☐ Statement filed in prior application. Status still proper and desired.

14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)

15. ☐ Other:

16. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information:

- [X] Continuation [] Divisional [X] Continuation-in-part (CIP) of prior application Nos: 08/825,249 and 09/200,244, respectively.

Prior application information: Examiner M. Graham

Group / Art Unit / 3711

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

- ☐ Customer Number or Bar Code Label or ☒ Correspondence address below.

ATTN: William M. Hanlon, Jr.
YOUNG & BASILE, P.C.
3001 WEST BIG BEAVER ROAD SUITE 624
TROY, MICHIGAN 48064-3107
UNITED STATES OF AMERICA

PHONE: (248) 649-3333
FACSIMILE: (248) 649-3338

Name (Print/Type): William M. Hanlon, Jr.

Registration No. (Attorney/Agent): 28422

Signature: _____

Date: August 28, 2000

THOMAS N. YOUNG
ANDREW R. BASILE
WILLIAM M. HANLON, JR.
MARSHALL G. MACFARLANE
DONALD L. WOOD
THOMAS D. HELMHOLDT
JASON J. YOUNG
TODD L. MOORE
LINDA M. DESCHERE
THOMAS E. BEJIN
DAVID B. EHRLINGER
KATHLEEN G. MELLON
DENISE M. GLASSMEYER
JULIA CHURCH DIERKER
DARLENE F. CONDRA
JAMES P. MITCHELL
AMANDA CONTI DUHAIME
MOLLY BASILE MARKLEY
CHRISTIAN J. GARASCIA
ERIC L. DOYLE
ARTHUR E. GOODING, Ph.D.

2001 COMMONWEALTH BLVD.
SUITE 301
ANN ARBOR, MI 48105-1562
TELEPHONE (734) 662-0270
FACSIMILE (734) 662-1014

YOUNG, BASILE, HANLON,
MACFARLANE, WOOD & HELMHOLDT, P.C.

PATENTS, TRADEMARKS AND COPYRIGHTS
3001 WEST BIG BEAVER ROAD
SUITE 624

TROY, MICHIGAN 48064-3107

TELEPHONE (248) 649-3333
FACSIMILE (248) 649-3338

700 HARRIS BUILDING
JACKSON, MI 49201
TELEPHONE (517) 787-4511
FACSIMILE (517) 787-4512
DUNCAN F. BEAMAN, RESIDENT ATTORNEY
TOWNSEND F. BEAMAN (1931-1993)

August 28, 2000

MT. CLEMENS
(810) 469-1141

GRAND RAPIDS
(616) 942-2324

Attorney's Docket: PAR-115-C
Box PATENT APPLICATION
Assistant Commissioner of Patents
Washington, D.C. 20231

EXPRESS MAIL LABEL NO.:

EL596485823US

Sir:

Enclosed please find an application for U.S. Patent as identified below.

Inventor: Allan McCarty

Invention: **BILLIARD CUE**

and including: Postcard; Utility Patent Application Transmittal; Application including Abstract, Specification, and claims; 3 sheets of informal drawings; Copy of Prior Combined Declaration, Power of Attorney and Verified Statement Claiming Small Entity Status;

Filing Fee: \$345.00

Please charge any deficiency or credit any excess in the enclosed fees to Deposit
Account No. 25-0115.

William M. Hanlon, Jr.
Attorney for Applicant
Registration No. 28422
(248) 649-3333

YOUNG & BASILE, P.C.
3001 West Big Beaver Road
Suite 624
Troy, MI 48064-3107

jc586 U.S. PTO
09/649473
08/28/00

Our Reference: PAR-115-C

PATENT

BILLIARD CUECROSS-REFERENCE TO CO-PENDING APPLICATION

5 This application is a continuation and a continuation-in-part of co-pending U.S. Patent Application serial numbers 08/825,249, filed March 27, 1997 and 09/200,244 filed November 25, 1998, the contents of both of which are incorporated herein in their entirety.

BACKGROUND OF THE INVENTIONField of the Invention:

10 The present invention relates, in general, to billiard cues and, more specifically, to billiard cue shafts.

Description of the Art:

Billiard or pool cues typically are formed of an elongated shaft; a butt at one end of the shaft and a ferrule mounted at an opposite end which supports a tip.
15 The shaft may be formed as a solid, one-piece member or of two threadably engageable sections. Typically, the shaft has been formed of a hard wood, such as a hard maple.

Other materials, such as aluminum, steel, plastic and carbon fiber, have also used to form billiard/pool cue shafts. Cues formed of such "non-wood" materials
20 have been engineered to approximate wood in weight and stiffness or rigidity; however none have proven to play better than a hard wood cue.

It is also known to form cue shafts of solid maple with a thin composite outer skin formed of various fibers and/or resin combinations. It is known to form a cue shaft of a solid glass bonded fiber as shown in U.S. Patent No.
25 3,103,359. It is also known to form a cue shaft as a composite tube of carbon fibers in which the shaft has a wall thickness of 0.060 inches or more and the hollow interior of the shaft is filled with foam as shown in U.S. Patent No. 4,816,203. U.S. Patent No. 5,112,046 discloses a shaft formed of a solid epoxy resin body with a central graphite core. This shaft accommodates flexure and impact by utilizing elongated

carbon filaments circumferentially spaced apart and concentrically disposed about the core and extending axially through the front and rear sections of the shaft.

Generally a billiard or pool cue is formed with one of two styles of taper. In an "American" taper, the cue has a constant diameter of approximately 0.5 inches for approximately the first twelve inches from the tip end, this being the longest bridge length commonly used in play. The other common type of taper is a so-called "European taper". In this style of cue, the cue has a truncated cone shape along its entire length tapering to a tip.

Previously devised ferrules have been formed of ivory which is substantially harder than that of the material used to form the shaft. More recently, reinforced phenolics and thermoplastics have been employed to form ferrules. Such ferrules have a modulus of elasticity ranging from a high of 1.3×10^6 psi to a low of 0.35×10^6 psi as compared to the 1.8×10^6 psi modulus of elasticity of hard maple commonly used to form the shaft. The ferrule is adhesively joined to and/or press fit to one end of the shaft, typically by means of a tenon in the form of a narrow diameter end portion which projects out of the end of the shaft into a hollow bore extending inward from one end of the ferrule or, alternately, from the ferrule into a bore in one end of the shaft. The tip, which is typically formed of leather, is adhesively joined to the ferrule.

In use, the shaft is lined up with the intended path of movement of the cue ball prior to stroking the shaft to impact the tip on the ball. The cue can also be lined up to strike the cue ball off center, that is, to the left or right of the center of the ball, or above or below the center of the ball, to generate spin, draw or follow to the cue ball to cause it to move in a desired direction after it strikes another ball or a rail. However, as a result of a hit to the left or right of center, the cue ball does not follow a path of movement that is parallel to the line of stroke of the cue. Rather, the cue ball deflects or moves in a path at an angle to the line of stroke of the cue. This so-called angle of deflection varies with the speed of the stroke and how far from center the cue tip strikes the cue ball, but with a given off center distance and speed, the magnitude of the angle of deflection is primarily a function of the cue itself.

During off center hits, the tip, ferrule and the end of the shaft up to the player's hand bridge initially buckles due to loading of the impact forces generated during impact of the tip with cue ball on an inside edge of the shaft closest to the center of the ball. This buckling is then followed by an outward flexing of the tip, ferrule and shaft end. Experimentation by the Applicants has shown that a large amount of buckling results in a larger and more undesirable deflection of the cue ball from a path of movement parallel to the cue stroke line than when buckling is minimized and the end of the cue more easily flexes or bends outward from the center of the cue ball after impact with the cue ball. Applicants have also found that a substantial amount of the cue ball deflection is due to the mass or weight of the shaft at the tip end of the shaft.

In order to address the cue ball deflection problem, the Applicants devised a billiard/pool cue disclosed in U.S. Patent No. 5,725,437 and in co-pending application, serial number 08/825,247. In both of these disclosures, a hollow bore is formed in the shaft extending from the first end for a predetermined distance toward the second or butt end. The bore forms a hollow cavity in the shaft after the ferrule is mounted on the first end of the shaft. The purpose of the bore is to reduce the weight of the tip end thereby resulting in a lighter tip end which is capable of easier outward flexing than previously devices cue shafts since the tip end can quickly accelerate laterally due to its reduced weight. The shaft of the cue disclosed in this patent and pending application is made of wood thereby necessitating large wall thicknesses for strength.

To further reduce the wall thickness of these prior cues devised by the applicants, the Applicants made refinements disclosed in co-pending application serial number 09/200,244, mentioned above. In this disclosure, the Applicants devised a billiard cue having a shaft formed with the hollow bore extending from a first end and having a wall thickness of about 0.030 to about 0.050 inches. The shaft was preferably formed of fibers disposed in a binder, such as carbon fibers disposed in an epoxy resin binder. A shaft wall construction of this type typically has a modulus of elasticity of greater than 4.3×10^6 P.S.I. for a 0.5 inch O.D. tip and shaft in the above described wall thickness of about 0.03 inches to about 0.05 inches. Thus, the

tip end of the shaft had significantly reduced weight as compared to the applicant's previously devised wood shaft with a hollow bore at the tip end while still retaining a high degree of rigidity to produce the desired significant reduction in buckling of the cue tip upon impact with a ball.

5 While billiard cues were constructed by the Applicants in either the wood or fiber versions as described above with a hollow bore extending for a predetermined distance from the tip end, thereby producing the shaft with greater deflection upon impact with a cue ball without buckling, it is believed that further improvements with respect to additional reductions in tip end weight can be obtained
10 without sacrificing the requisite stiffness to weight ratio of the billiard cue.

Thus, it would be desirable to provide a billiard cue which has a significantly reduced weight at the tip end of the shaft while maintaining sufficient stiffness to minimize flexure or buckling of the tip end of the shaft and thereby deflection of a ball struck by the cue. It would also be desirable to provide a billiard
15 cue formed of a material having high strength and stiffness; while at the same time providing a light weight and low mass at least at the tip end of the shaft. It would also be desirable to provide a billiard cue formed of a material having a unique combination of stiffness and lightweight to enable the tip of the cue to be displaced on impact with a ball while still remaining in contact with the ball as the ball begins to
20 rotate.

SUMMARY OF THE INVENTION

The present invention is a billiard cue which significantly reduces cue ball deflection by significantly reducing the mass and/or weight of the tip end of the shaft while maintaining the shaft stiffness substantially equal to or greater than the
25 stiffness of a comparable shaft formed of solid maple.

In a preferred embodiment, the billiard cue includes a shaft having an outer surface and first and second ends. A hollow bore extends from the first end for a predetermined distance along the length of the shaft toward the second end. The hollow bore at the tip end of the shaft can either be void of material or filled with a
30 light weight, non-structural material which does not significantly add to the weight of the tip end of the shaft. Thus, vibration and sound dampening materials, such as

00649473-082800

foam, cotton, etc., to be placed within the bore without significantly detracting from the weight reducing features provided by the hollow tip end bore of the present invention.

The shaft can be formed of a conventional wood, such as a hard wood, and more specifically, maple. Alternately, the shaft can be formed of fibers disposed in a binder. More particularly, the shaft is formed of graphite fibers disposed in an epoxy binder.

In the latter aspect of the invention, the bore at the tip end of the shaft can be formed with a wall thickness of about 0.005 to about 0.050 inches. This reduces the weight of the tip end of the bore. However, the fiber/binder material forming the shaft, or at least at the tip end of the bore, has a significantly high stiffness to weight ratio to provide the requisite resistance to buckling on impact with a ball to reduce the deflection of the struck ball from its intended path of movement.

The hollow bore at the requisite thin wall thickness described above where the shaft is formed of either wood or a fiber/binder mixture, may be formed as an isolated bore only at the tip end of the shaft or, alternately, as part of an elongated bore extending through all or at least a substantial portion or all of the shaft. However, it is only the tip end portion of the bore which is critical to the weight reducing features of the present invention. Thus, the diameter of the bore beyond the tip end, such as beyond the point on the shaft which a billiard player normally rests the cue on a bridge formed with one hand can be solid or formed with a different diameter.

The billiard cue of the present invention is constructed to provide a significantly reduced mass or weight at the tip end of the shaft, while maintaining the stiffness of the shaft substantially equal to or greater than a conventional solid shaft made of hard maple. The reduced mass is achieved by forming a hollow bore in the shaft extending for a predetermined distance from the first end of the shaft thereby reducing the material weight at the first end of the shaft. This lower mass at the tip end of the shaft and high stiffness of the shaft material reduces flexure or buckling of the tip end of the cue shaft when the shaft impacts on a ball thereby significantly reducing the deflection of the struck ball from its intended path of movement

generally parallel to the stroke axis of the cue shaft. However, the unique combination of stiffness and lightweight characteristics maintain the cue tip on the ball while allowing deflection of the tip as the ball begins to rotate.

BRIEF DESCRIPTION OF THE DRAWING

5 The various features, advantages and other uses of the present invention will become more apparent by referring to the following detailed description and drawing in which:

Fig. 1 is a side elevational view of a billiard cue constructed in accordance of the teachings of the present invention;

10 Fig. 2A is an enlarged, cross-sectional view generally taken along line 2A-2A in Fig. 1;

Fig. 2B is an enlarged, cross-sectional view generally taken along line 2A-2A in Fig. 1, but showing an alternate aspect of the present invention;

15 Fig. 3 is an enlarged cross-sectional view of the tip, ferrule and tip end of the shaft of the cue shown in Fig. 1; and

Figs. 4A and 4B are pictorial representations depicting the impact of a conventional cue and the cue of the present invention with a ball.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

20 Referring now to the drawing, and to Figs. 1 and 2A in particular, there is depicted a billiard/pool cue 10 constructed in accordance with the teachings of the present invention.

As shown in Figs. 1-3, the cue 10 includes a shaft 12, a butt end 14, a ferrule 16 and a tip 18. The shaft 12 may be formed of a single elongated member or two short members which are coaxially joined together.

25 The shaft 12 has a first end 20 on which the ferrule 16 is mounted, as described hereinafter and an opposed second end 22 to which the butt 14 is mounted in a conventional manner. A bore 24 extends through the shaft 12 at least for a predetermined distance from the first end 20. Alternately, the bore 24 of the same or different diameter may extend for the entire length of the shaft 12 between the first
30 and second ends 20 and 22. Although an exterior surface 26 of the shaft 12 may be

008280-27464960

formed with either American or European tapers, the inner diameter or I.D. of the bore 24 can remain constant along its entire length.

In an exemplary "American taper" shaft 12, the wall thickness of the shaft 12 from the first end 22 to a point denoted by reference numeral 28 which is approximately 14-15 inches from the first end 20, is at a constant I.D. of about 0.005 to about 0.050 inches. In the "American taper" the O.D. of the shaft 12 between the first end 20 and the intermediate point 28 also remains constant.

From the point 28 to the second end 22, the exterior surface 26 of the shaft 12 tapers outwardly in a smooth, concave shape to another point 30 spaced from the second end 22 wherein it makes a convex transition to a generally straight taper of approximately 0.015 inches per inch to the second end 22.

From the intermediate point 28 to the second end 22, the wall thickness of the shaft 12 can increase as the O.D. of the shaft 12 increases toward the second end 22. Alternately, the remainder of the shaft 12 beyond the point 28 maybe a solid shaft.

The point 28 is spaced a distance "X" from the first end 20 of the shaft 12. This distance "X" is approximately four to five inches, by example only for a wood shaft.

In another aspect, the shaft 12 is preferably formed of a composite material, such as graphite epoxy or fiber reinforced plastics, which are typically many times stronger per unit weight than hard maple. For example, graphite or carbon fibers imbedded in an epoxy resin binder may have a modulus of elasticity of greater than 4.3×10^6 psi for a 0.5 inch O.D. tip end shaft and the above-described wall thickness of about 0.005 to 0.050 inches. Generally, the graphite or carbon fibers, which may also be glass fibers, extend linearly along the length of the shaft 12 between the first and second ends 20 and 22. The density of the fibers changes the modulus of elasticity of the shaft 12. Thus, in an exemplary embodiment, the shaft 12 is formed of linearly extending fibers and a binder having a modulus elasticity of at least as great as 4.3×10^6 psi and a thin wall thickness, such as at least at the tip end 20 of the shaft 12, formed by a minimum of four or five layers of diameter of fibers. Other binder materials, such as polyester, etc. may also be employed. Thus, glass

fiber/epoxy or glass fiber/polyester composites may also be employed to form the shaft 12.

As shown in Fig. 2A, the bore 24 is left void or hollow. Alternately, as shown in Fig. 2B, the bore 24 can be partially or substantially completely filled with a non-structural material, such as foam, cotton, etc., for vibration and/or sound dampening purposes. Such materials have a light weight and do not significantly detract from the weight reducing features of the tip end of the shaft 12.

In a fiber shaft construction, the bore 24 extends for up to at least 10 to 12 inches.

The shaft 12 formed of fibers and having the specified modulus of elasticity and the thin wall cross-section specified above has about an 80% decrease in mass toward the tip end 20 of the shaft 12 as compared to a similar size solid maple shaft. The decreased mass at the tip end 20 of the shaft 12 increases the lateral force transmitted to the cue ball due to the necessary lateral acceleration of the tip 20 of the shaft 12. This enables the cue ball to laterally push the shaft tip end aside without buckling of the shaft.

At the same time, despite the reduced mass, the fiber material preserves approximately 94% of the stiffness of the shaft. This minimizes flexure or buckling of the tip end 20 of the shaft 12 and decreases deflection of the cue ball from its intended path of movement. Thus, the dramatically reduced tip end weight coupled with substantially the same stiffness as compared to a solid hard wood shaft increases the specific stiffness to weight ratio of the shaft.

The reduced weight tip end of the shaft 12, as described above, may also be applied to a wood shaft made of a hard wood, such as maple. In this aspect of the invention, the bore 24 is formed as described above is extending from the first end 20 of the shaft 12 to at least the point 28. The bore 24 in such a wood shaft can be hollow as shown in Fig. 2A, or filled with a lightweight, non-structural material, such as foam, cotton, etc., as shown in Fig. 2B.

In such a wood shaft with a hollow tip end bore 24, the tip end weight is reduced about 30%; while the stiffness is reduced by only about 10%. Thus, the specific stiffness to weight ratio is increased.

For completeness, a brief description of ferrule 16 and tip 18 will be provided herein. However, further details concerning the construction of the ferrule 16 and the tip 18 may be found by referring to the above-referenced and incorporated co-pending application and patent.

5 The ferrule 16, as shown in Fig. 3, has a generally cylindrical shape with either straight side walls or a slight taper between a first end 30 and a second end 32. The second end 32 may be generally planar or formed with a concave recess as shown by example only in Fig. 3. The ferrule 16 may be formed with a variety of materials, such as nylon, ABS, urethane, etc., as long as the ferrule 16 has greater
10 compression in the longitudinal direction than the compressibility of a material used to form the shaft 12.

Various mounting arrangements may be employed to mount or attach the ferrule 16 to the first end 20 of the shaft 12. As shown in Fig. 3, in one exemplary mounting arrangement, an annular shoulder 40 is spaced from the first end 20 of the
15 shaft 12 and receives a second end 32 of the ferrule 16. The side wall of the ferrule 16 is notched so as to seat against the first end 20 of the shaft 12.

The shaft 12 is further notched as shown by reference number 42 to form an annular recess extending from the first end 20. A support member 44, such as an annular band of radially extending glass or carbon fibers, is optionally wrapped
20 around the end of the shaft 12 in the recess to increase the strength of the ferrule 16 mount to fully retain the ferrule 16 in the shaft 12.

The tip 18 is formed of a conventional material and is typically mounted by means of an adhesive to the first end 30 of the ferrule 16. Optionally, a resilient pad, not shown, may be interposed between the tip 18 and the first end 30 of
25 the ferrule 16.

The advantages of the cue 10 of the present invention may be more clearly understood by reference to Figs. 4A and 4B which respectively show the action of a conventional shaft 52 and a shaft 14, ferrule 16 and tip 18 of the present invention on impact with a ball 74. The conventional shaft 52, shown in Fig. 4A, is
30 formed of hard maple. Impact forces generated during an off-center impact of the shaft 52 with a ball 54 causes the tip end of the shaft 52 to buckle inward along the

inside edge of the shaft 52 pushing the shaft 52 laterally outward at increasingly larger angles A, B and C. This results in deflection of the ball 54 along path 56 which is not parallel to the stroke axis of the shaft 52.

Fig. 4B depicts the action of the tip end of the cue 10 of the present invention during impact with the ball 54. Due to the high stiffness and light weight of the tip end of the cue 10, deflection of the tip end of the shaft 12, as shown in Fig. 2B, is minimized. However, the cue 10 exhibits easy radially outward flexure, to the positions shown in phantom in Fig. 4B during impact with the ball 74, which results in less deflection of the ball 74 from a line parallel to the line of movement or stroke axis of the shaft 14. The successive angles A', B' and C' are smaller than the angles A, B, C, respectively, in Fig. 4A. The combination of light tip end weight and high stiffness enables the tip 18 of the cue 10 to remain in contact with the ball 54 without added deflection as the ball begins to rotate. As a result, the ball 54 travels along path 58 which is more closely aligned or parallel with the stroke axis of the cue 10.

In summary, there has been disclosed a unique billiard cue having a unique shaft construction which minimizes buckling of the tip end of the shaft and significantly reduces the amount of deflection of a cue ball struck by the shaft from an intended path of movement generally parallel to the longitudinal stroke axis of the shaft.

What is claimed:

1. A billiard cue comprising:
a shaft having a wall with an outer surface and first and second ends, a hollow bore extending from the first end for at least a predetermined distance along the length of the shaft toward the second end.
2. The billiard cue of claim 1 further comprising:
the shaft formed of fibers disposed in a binder; and
the shaft having a wall thickness of about 0.005 inches to about 0.050 inches across opposed ends of the bore.
3. The billiard cue of claim 2 wherein the fibers are carbon fibers disposed in an epoxy resin binder.
4. The billiard cue of claim 2 wherein the shaft is formed of a material having a modulus of elasticity greater than or equal to 4.3×10^6 P.S.I.
5. The billiard cue of claim 1 wherein:
the shaft is formed of wood.
6. The billiard cue of claim 5 wherein the bore extends located from about 4 to about 5 inches from the first end of the shaft.
7. The billiard cue of claim 3 wherein:
the bore extends for up to at least 10 to 12 inches from the first end.

BILLIARD CUEABSTRACT

- A billiard cue includes a shaft having a hollow bore extending for a predetermined distance from a first end of the shaft to reduce the tip end weight of the shaft. In one aspect, where the shaft is formed of a composite material consisting of fibers in a binder, such as carbon fibers in an epoxy resin, the bore forms an outer wall in the tip end of the shaft having a thickness between about 0.005 and about 0.05 inches. The shaft material has a modulus of elasticity of at least 4.3×10^6 psi. The bore extending from the first end of the shaft, the thin wall thickness of the tip end of the shaft and the material forming the shaft combine to decrease the mass of the tip end of the shaft while maintaining substantially all of the stiffness of a conventional solid wood shaft formed of a hard maple to minimize buckling of the tip end of the shaft and thereby substantially decrease deflection of the cue ball from its intended path of movement along a path parallel to the stroke axis of the shaft. The tip end bore may be left hollow or filled with a light weight, non-structural material. The hollow bore is equally applicable to shafts formed of wood.

06649473:032300

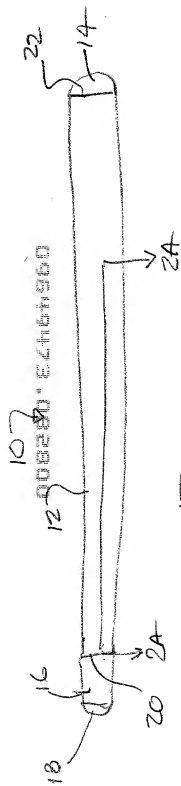


FIG. 1

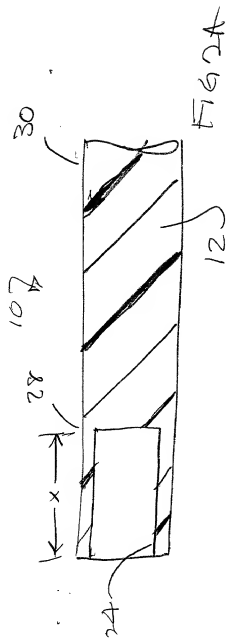


FIG 2A

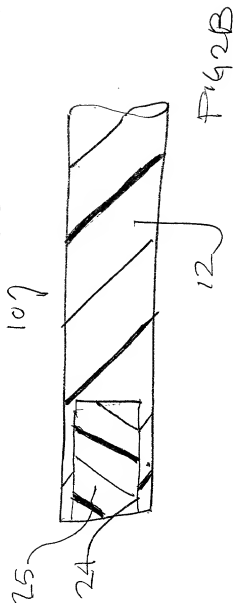


FIG 2B

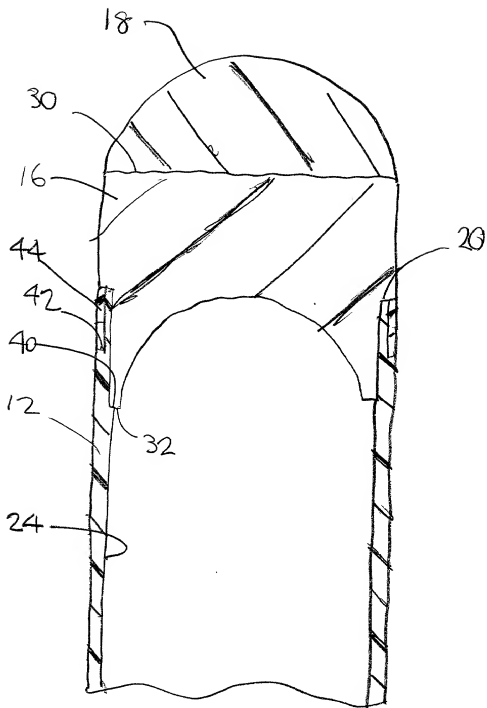


FIG 3

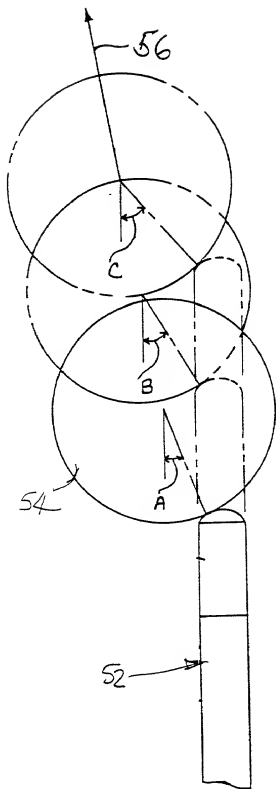


FIG 4A

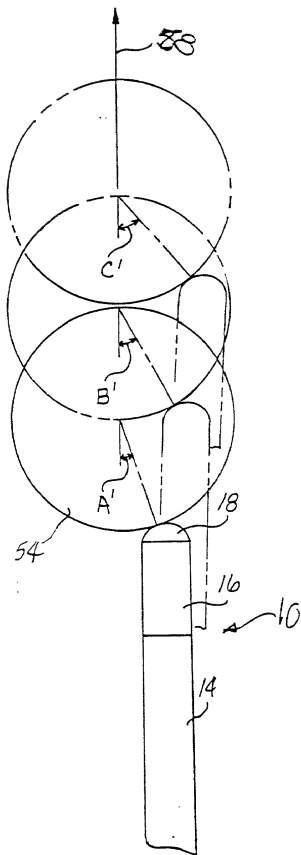


FIG 4B

Our Reference: PAI-107-A

**COMBINED DECLARATION, POWER OF ATTORNEY AND
VERIFIED STATEMENT CLAIMING SMALL ENTITY STATUS****DECLARATION:**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

BILLIARD/POOL CUE

the specification of which (check only one item below):

☒ [X] is attached hereto.☐ [] was filed as United States application Serial No. _____ on _____, and was amended on or through _____ (if applicable).☐ [] was filed as PCT international application Number _____ on _____, and was amended under PCT Article 19 on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application on which priority is claimed:

Prior Foreign/PCT Application(s) and any Priority Claims Under 35 U.S.C. §119:

(Number)	(Country)	(Day/Mo/Yr Filed)	Priority Claimed	
			<input type="checkbox"/> Yes	<input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international application(s) designating the United States of America listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U. S. Application(s) or PCT International Application(s) Designating the U.S. for Benefit Under 35 U.S.C. §120:

(Application S.N.)	(Filing Date)	(Status: patented, pending, abandoned)

POWER OF ATTORNEY

I hereby appoint Andrew R. Basile, Patent Office Registration No. 24753, William M. Hanlon, Jr., Patent Office Registration No. 28422, and Thomas D. Helmholdt, Patent Office Registration No. 33181, as my attorneys, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith.

Send all correspondence to:

William M. Hanlon, Jr.
 Basile and Hanlon, P.C.
 1650 West Big Beaver Road, Suite 210
 Troy, Michigan 48064
 Phone: (810) 649-0990

VERIFIED STATEMENT:

I hereby declare that I qualify as an independent inventor as defined in 37 CFR §1.9(c) for purposes of paying reduced fees under §41(s) and (h) of Title 35, United States Code, to the Patent and Trademark Office with regard to the above-entitled invention described in the specification.

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR §1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR §1.9(d) or a nonprofit organization under 37 CFR §1.9(e).

008280-22461950

Each person, concern or organization to which I have assigned, granted, conveyed or licensed or am under an obligation under contract or law to assign, grant, convey or license any rights in the invention is listed below:

- ☐ no such person, concern or organization;
☒ person, concerns or organizations listed below

FULL NAME Player's Accessories, Inc.

ADDRESS 1032 Crooks Road, Suite F, Clawson, Michigan 48017

☐ INDIVIDUAL ☒ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor Allen McCarty

Inventor's Signature Allen McCarty

Date 9-28-94 Citizenship U.S.A.

Residence 1112 Pinchurn, Royal Oak, Michigan 48073

Post Office Address Same as Above

Full name of second joint inventor if any Steve Titus

Inventor's Signature Steve C. Titus

Date 9-28-94 Citizenship U.S.A.

Residence 750 E. Shore Drive, Whitmore Lake, Michigan 48189

Post Office Address Same as Above

008280-2764960